

Tact Switch

YST-2017 SMD Type



Feature

2.9mm x 3.9mm x 2mm outer dimension.
Reflow solderable and dust prevented structure.

Available operating forces : 160gf, 260gf




Applications

For operating various electronic devices such as audio devices, communication devices, portable devices, etc.


Specifications

Item	Rating	Travel	Contact Resistance	Bounce	Operating Force	Operating Life
Value	DC 12V 50mA MAX	0.2 ± 0.1mm	100mΩ MAX	10m sec MAX	160 ± 50gf	100,000 Cycle


Dimensions




CIRCUIT DIAGRAM



PCB MOUNTING HOLE DIMENSIONS



REEL POCKET

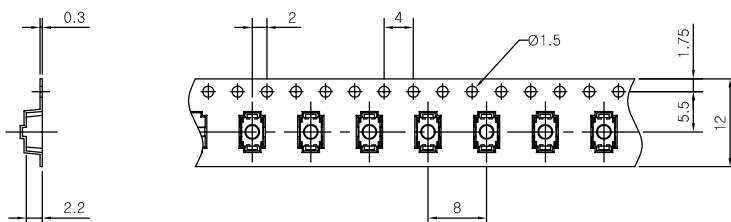

1. General Tolerance : 0.1mm
2. Angle for pocket side : 5°
3. Pocket Material : Plastic
4. Packing quantity : 2,500 PCS
5. Reel Diameter : 330mm